
DATASHEET

L160D

AIRTECH VACUUM

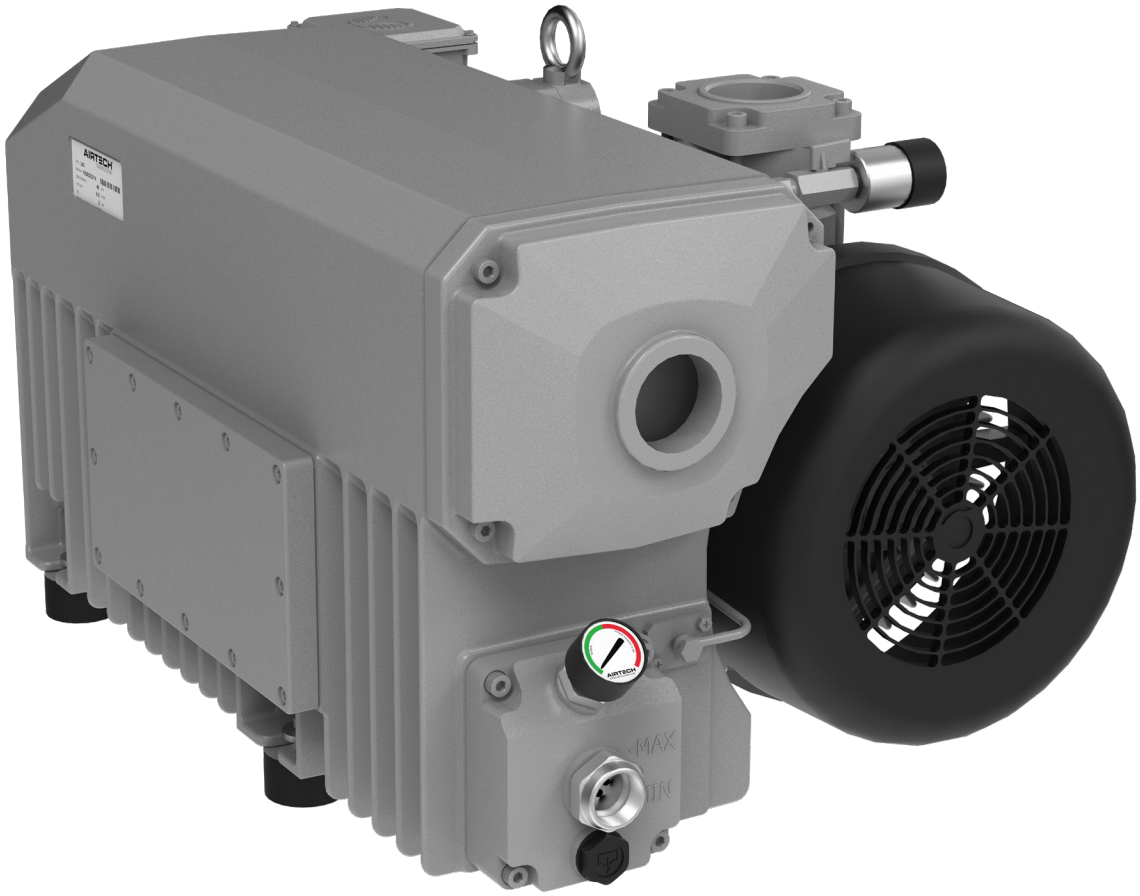

COMPACT

DIRECT DRIVE DESIGN REQUIRES NO BELTS,
EASY INSTALLATION

QUIET OPERATION

INTEGRATED EXHAUST FILTERS & VIBRATION ISOLATORS
REDUCE VIBRATION AND NOISE LEVEL

DURABILITY

HIGH PERFORMANCE COMPOSITE VANES & IMPROVED
OIL RECIRCULATION SYSTEM INCREASE LONGEVITY

APPLICATIONS

MEAT PACKAGING

FOOD PROCESSING

DEGASSING

VACUUM HOLD DOWN

PICK AND PLACE

MEDICAL VACUUM


VACUUM FORMING

L-SERIES | OIL-LUBRICATED ROTARY VANE VACUUM PUMP

AIRTECH® VACUUM

L160D

PERFORMANCE

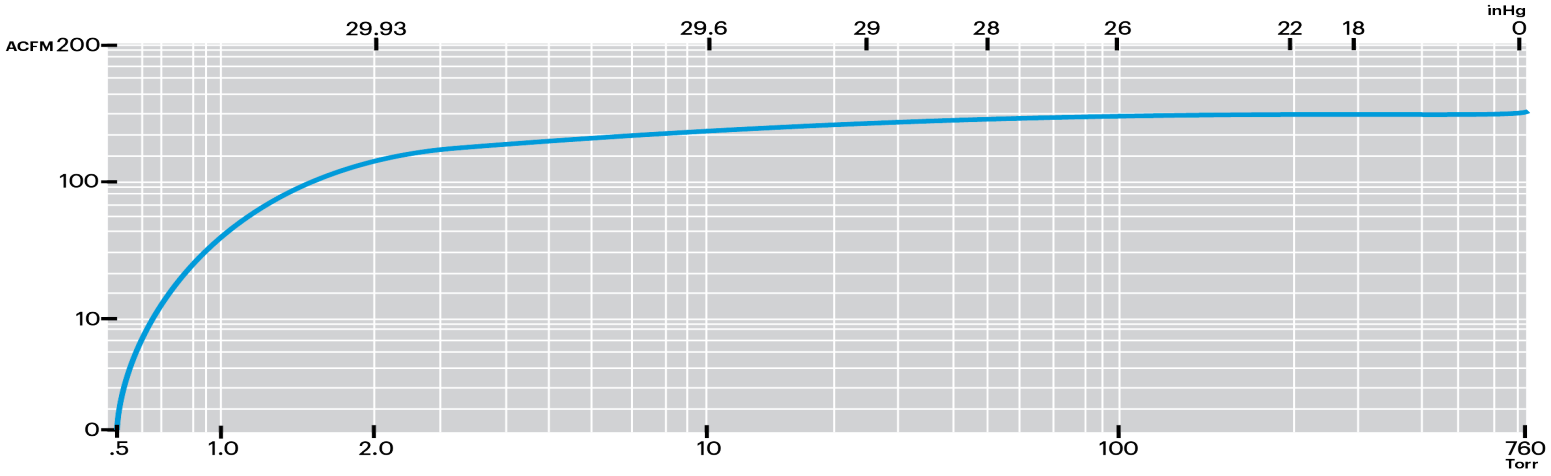

Pump Performance Measured at the Inlet Pressure and 20°C. Accuracy is +/- 10%


Model	Capacity	Ultimate Vacuum	Motor Rating	Speed	Voltage	FLA	dB[A]	Weight*
L160D	124 ACFM	0.5 Torr	7.5 HP	1765	230/460	17.7/8.9A	77	362 Lbs


*Standard Motor is C1D2 Compliant. Additional Motor Types and Voltages May be Available Upon Request


DIMENSIONS

ACCESSORIES

Inlet Filter	ATF-200-15124
Filter Element	ATC-15124
Check Valve	07-1-4SLB
Exhaust Filter Kit	0500.505.00
Overhaul Kit	0350.500.01
Combo Overhaul Kit	0350.509.01

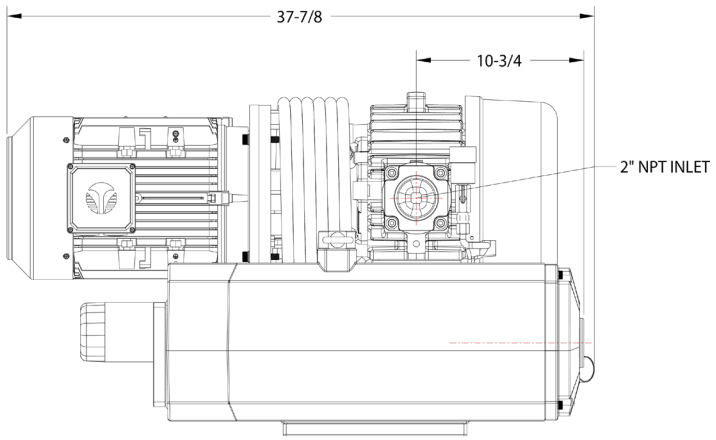

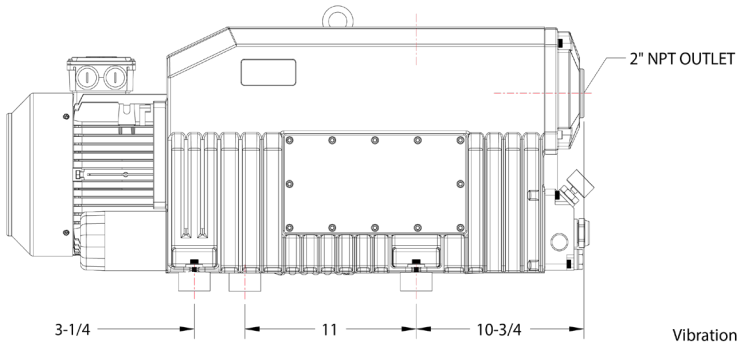

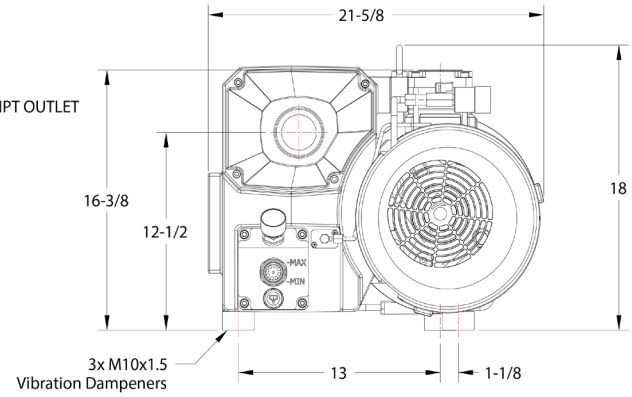

AIRTECH VACUUM
A BUSINESS UNIT OF IDEX
301 VETERANS BLVD.,
RUTHERFORD, NJ 07070

Specifications are subject to change without notice or obligation. Read all safety instructions in the manual prior to use.

LEARN MORE ABOUT THE L-SERIES

Copy Right Airtech Vacuum

REVISION DATE: 5/30/2024