

F2



HURST
JAWS OF LIFE®

E2 BY HURST

PROVEN POWER. RELENTLESS DURABILITY. UNMATCHED VALUE.

Built on a trusted hydraulic platform and engineered to perform under pressure, E2 delivers the cutting force, spreading strength, and reliability departments depend on.


E2 is built for departments that need reliable, durable tools at a practical investment. It delivers the freedom of cordless hydraulics with the ruggedness you expect.

What E2 Delivers

- **Untethered hydraulic power** means no hoses, no external power units, no limitations
- **Proven durability** built to withstand demanding rescue environments shift after shift
- **High-output performance** in a lighter, more controllable package
- **Ergonomic star-grip control** for confident operation from virtually any position

Power & Runtime You Can Trust

- **Li-ion EXL batteries (5Ah)** engineered for consistent output and fast changeouts
- **Up to 60 minutes of runtime** under typical rescue conditions
- **All-weather performance** down to -4°F
- **Kit includes two batteries + charger** to keep crews operational
- **Optional 110V adapter** for plug-in capability on select models

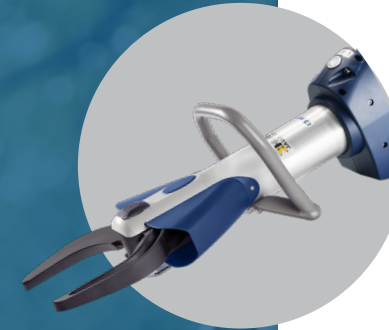

CUTTERS

High-bite strength and wide blade openings to take on modern vehicle construction.




SPREADERS

Faster, stronger and lighter than prior models with shark tooth tips for grip and hold.



COMBI TOOLS

Compact bodies that both cut and spread, ideal for when versatility matters.

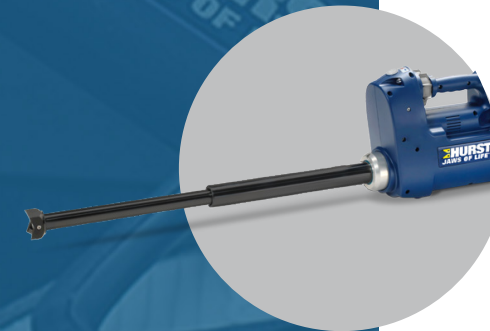

RAMS

Multi-stage reach with ergonomic controls, extended lengths up to 53" for wider openings.

S 789E2 CUTTER

PART#: 272044000



Wide opening control for modern vehicle construction

Built to handle today's stronger vehicle materials, the S 789E2 features an 8.07-inch blade opening that allows clean, perpendicular cuts through A- and B- posts. Its wide jaw reduces swing challenges, helping crews maintain control and efficiency on scene. Battery-powered flexibility, plus optional plug-in capability, supports continuous operations when extended cutting is required.

TECHNICAL SPECIFICATIONS

- Length: 39 in / 991mm
- Width: 10.5 in / 266 mm
- Height: 11.1 in / 281 mm
- Weight: 50.5 lb / 22.9 kg
- Cutter Opening: 8.07 in / 205 mm
- NFPA Cutter Rating: A8/B9/C7/D9/E9/F4
- NFPA 1936 2015 Compliant: Yes
- IP Rating: IP54

FEATURES AND BENEFITS

- Tools are sold separately or as a kit that includes two batteries and one charger.
- If needed, you can plug it in for limitless run time with the eDRAULIC 110V adapter
- Wide blade opening at 8.07 inches

S 799E2 CUTTER

PART#: 272799000



Built for the toughest conditions under extreme pressure

Engineered for today's reinforced vehicle construction, the S 799E2 delivers best-in-class cutting performance when conditions are at their worst. Its 8.03-inch opening enables clean, perpendicular cuts through A- and B- posts, reducing repositioning and fatigue. It's a cutter crews can trust on every call.

TECHNICAL SPECIFICATIONS

- Length (w/o battery): 35.7 in / 907 mm
- Length: 39.8 in / 1010 mm
- Width: 10.6 in / 269 mm
- Height: 11.1 in / 281 mm
- Weight: 55.8 lbs / 25.3 kg
- Cutter Opening: 8.03 in / 204 mm
- NFPA Cutter Rating: A9/B9/C9/D9/E9/F5
- NFPA 1936 2015 Compliant: Yes
- IP Rating: IP54

FEATURES AND BENEFITS

- Wide blade opening at 8.03 inches
- An NFPA rating of 9 for all categories
- Reduces tool swing challenges
- Tools are sold separately or as a kit that includes two batteries and one charger.
- If needed, you can plug it in for limitless run time with the eDRAULIC 110V adapter

SP 555E2 SPREADER

PART#: 271555000



Balanced strength that speeds up complex extrications

Designed for control and efficiency, the SP 555E2 delivers powerful spreading performance in a lighter, more maneuverable form. Shark Tooth removable tips with four rows of teeth help maintain a secure hold on challenging materials. Combined with a dependable li-ion battery, it supports faster, more controlled operations from start to finish.

TECHNICAL SPECIFICATIONS

- Length (w/o battery): 35.7 in / 907 mm
- Length: 39.4 in / 1,002 mm
- Width: 10.4 in / 265 mm
- Height: 11.3 in / 287 mm
- Weight: 44.1 lbs / 20 kg
- Spreading Distance: 28.7 in / 730 mm
- Max Spreading Force: 147,924 lbs / 658 kN
- Max Pulling Force: 13,039 lbs / 58 kN
- NFPA HSF: 16,186 lbs / 72 kN
- NFPA LSF: 11,016 lbs / 49 kN
- NFPA HPF: 10,341 lbs / 46 kN
- NFPA LPF: 6,295 lbs / 28 kN
- NFPA 1936 2015 Compliant: Yes
- IP Rating: IP54

FEATURES AND BENEFITS

- Enhanced performance – 16% lighter and has 14% more power than its predecessor
- Single integrated cylinder body design
- Squeezing plates built into the arms
- “Shark Tooth” removable tips offer multifunctional design, with four rows of shark-like teeth for maximum performance and gripping
- Tools are sold separately or as a kit that includes two batteries and one charger.
- If needed, you can plug it in for unstoppable run time with a 110V adapter

SC 358E2 COMBI

PART#: 273023000



One tool built to adapt on every scene

The SC 358E2 combi tool delivers cutting and spreading performance in one compact, dependable design. Built for versatility, it supports crews who need to adjust quickly as conditions change, without slowing down tool swaps. A reliable option for responders who value flexibility and proven performance under pressure.

TECHNICAL SPECIFICATIONS

- Length: 37.7 in / 956 mm
- Width: 9.3 in / 237 mm
- Height: 10.9 in / 278 mm
- Weight: 41.5 lbs / 18.8 kg
- Spreader Distance: 14.5 in / 368 mm
- Max Spreading Force: 337,230 lbs / 1,500 kN
- Max Pulling Force: 13,714 lbs / 61 kN
- NFPA HSF: 9,667 lbs / 43 kN
- NFPA LSF: 7,419 lbs / 33 kN
- NFPA HPF: 13,940 lbs / 62 kN
- NFPA LPF: 9,667 lbs / 43 kN
- NFPA Cutter Rating: A7/B8/C7/D8/E7/F4
- NFPA 1936 2015 Compliant: Yes
- IP Rating: IP54

FEATURES AND BENEFITS


- Tools are sold separately or as a kit that includes two batteries and one charger.
- If needed, you can plug it in for limitless run time with the eDRAULIC 110V adapter
- “Shark Tooth” removable tips offer a multifunctional design, with four rows of shark-like teeth for maximum performance and gripping.
- Cutting blade surface is taken to the end of the blade, allowing for a more aggressive blade geometry.

ACCESSORIES

Optional Chain Set: # 541C054

R 421E2 RAM

PART#: 274085000

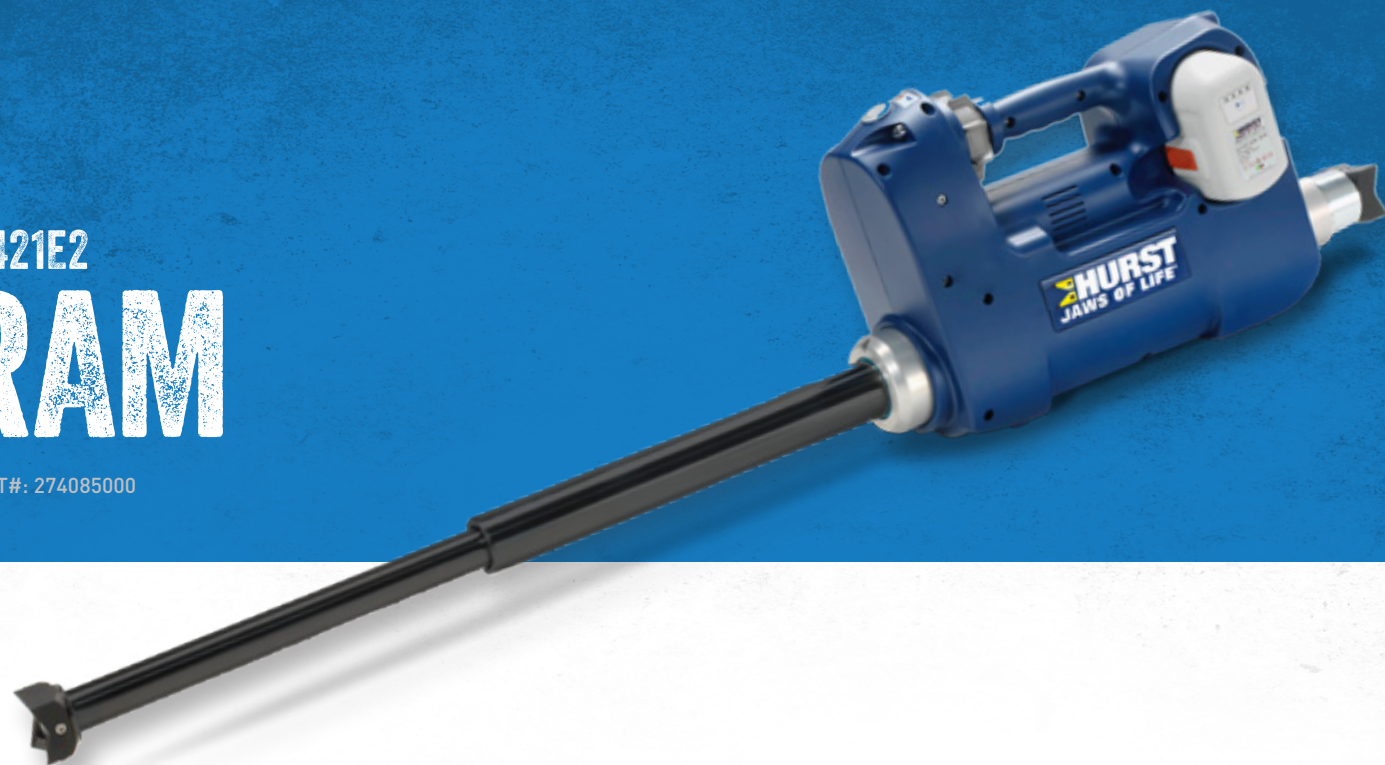

Compact reach and control for confined rescue scenes

The R 421E2 is the industry's first battery-powered telescopic rescue ram, extending up to 53" in a compact form. Rotating 360-degree claws at both ends allow precise placement in unstable or confined spaces. Designed to give crews controlled expansion and flexibility when access and stability are limited.

TECHNICAL SPECIFICATIONS

- Length Retracted: 23.5 in / 597 mm
- Length Extended: 53 in / 1,347 mm
- Width: 5.31 in / 135 mm
- Height: 12.3 in / 313 mm
- Weight: 41.9 lbs / 19 kg
- Stroke:
 - Piston 1: 15.2 in / 387 mm
 - Piston 2: 14.3 in / 363 mm
 - Piston 3: 29.5 in / 750 mm
- Max Pushing Force:
 - Piston 1: 28,600 lbs / 127 kN
 - Piston 2: 13,500 lbs / 60 kN
- NFPA 1936 2015 Compliant: Yes
- IP Rating: IP54

FEATURES AND BENEFITS

- Each tool comes with two batteries and one charger.
- If needed, you can plug it in for limitless run time with the eDRAULIC 110V adapter
- Telescopic ram extends up to 53" in a compact form
- Rotating 360-degree claws at both ends for precise placement

S 120 E MINI CUTTER

PART #: 272004000-1
272004000-2



The reliability you deserve. The flexibility you need.

PROVEN TOUGH

Steering wheels, pedals, and seat belts are no match for the Mini Cutter's powerful blades, shown to cut through a lock size 12 and a grade 43 hardness chain in extreme extrication tests.

EFFORTLESS OPERATION

Easy one-handed positioning, an automatic LED light, and a push-button start mean you can focus on the rescue at hand, not the tool in your hand. We keep it simple to make your hard work just a little easier.

HEAVY DUTY, LIGHTWEIGHT

Save your energy for the moments that matter with an ultra-lightweight but durable design that means you'll always be ready to rescue without ever being weighed down.

POWER IN YOUR PALM

A compact size means the Mini Cutter is smartly made to move with you, not against. At just about 8 pounds, you can keep it in your toolkit for when it's go time.

As tough as the rescuers who put it to work, the S 120E Mini Cutter by HURST helps you get big jobs done—anytime, anywhere.

FEATURES & BENEFITS

- Easy to use in confined spaces
- Saves space and weight on rescue vehicles
- Battery-powered design, immediately ready for use
- Lightweight for one-person operation
- Allows for rapid entry
- Integrated LED lighting

TECHNICAL SPECIFICATIONS

- Length: 18.3 inches
- Width: 3.21 inches
- Height: 5.08 inches
- Weight: 8.1 pounds
- NFPA Cutter Rating: A5/B3/C2/D3/E3
- Cutter Opening: 2.06 inches
- NFPA Compliant: Yes

WHY CREWS CHOOSE E2

Your equipment decisions come down to one question: **Will it perform when your crew needs it most?**

The E2 Series has proven it will. It's built for consistent, dependable performance on routine calls and under pressure. Your crew can operate it with confidence from day one, and you can rely on it year after year.

For many departments, **E2 delivers reliable power, straightforward operation, and durability that holds up to daily use.**

- **Move faster on scene** with zero hose management
- **Operate with confidence** on a platform proven in the field
- **Upgrade aging equipment** with modern performance at a lower price point

COMPARE TOOL SERIES



	E3 CONNECT	E3	E2
Smart Dashboard	✓	✓	
Submergible	Both fresh and salt water, up to 20'	Both fresh and salt water, up to 20'	Water resistant
Battery-Powered	✓	✓	✓
Roll Warning Alerts	✓	✓	
Turbo Function	✓	✓	
Captium-Enabled	✓		
Captium Operational Dashboard	✓		
Usage and Performance Data	✓		
Maintenance	Alerts, automated logs, predictive maintenance, integrated S&R communication.	Manual	Manual
Root Cause Troubleshooting	✓		
NFPA Compliant Reporting	Automated	Manual	Manual



BUILT TO EXTEND LIVES™

800.537.2659

711 N. Post Road Shelby, NC 28150

International Callers: +1.704.487.6961

JAWSOFLIFE.COM



© 2026 HURST JAWS OF LIFE® SUBJECT TO REVISION

