
DATASHEET

L250F

AIRTECH VACUUM

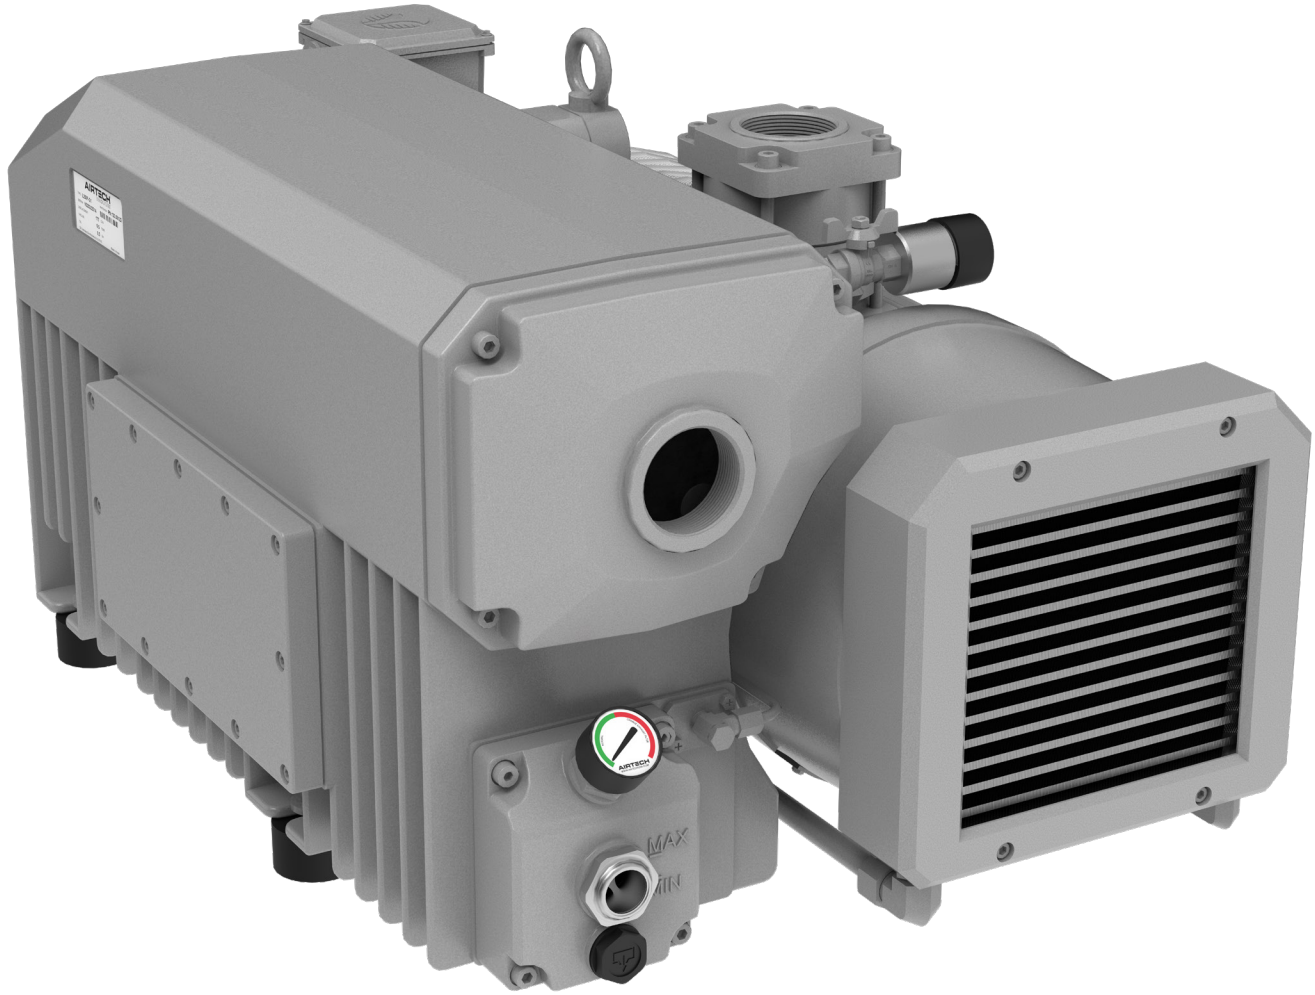

COMPACT

DIRECT DRIVE DESIGN REQUIRES NO BELTS,
EASY INSTALLATION

QUIET OPERATION

INTEGRATED EXHAUST FILTERS & VIBRATION ISOLATORS
REDUCE VIBRATION AND NOISE LEVEL

DURABILITY

HIGH PERFORMANCE COMPOSITE VANES & IMPROVED
OIL RECIRCULATION SYSTEM INCREASE LONGEVITY

APPLICATIONS

MEAT PACKAGING

FOOD PROCESSING

DEGASSING

VACUUM HOLD DOWN

PICK AND PLACE

MEDICAL VACUUM


VACUUM FORMING

L-SERIES | OIL-LUBRICATED ROTARY VANE VACUUM PUMP

AIRTECH® VACUUM

L250F

PERFORMANCE

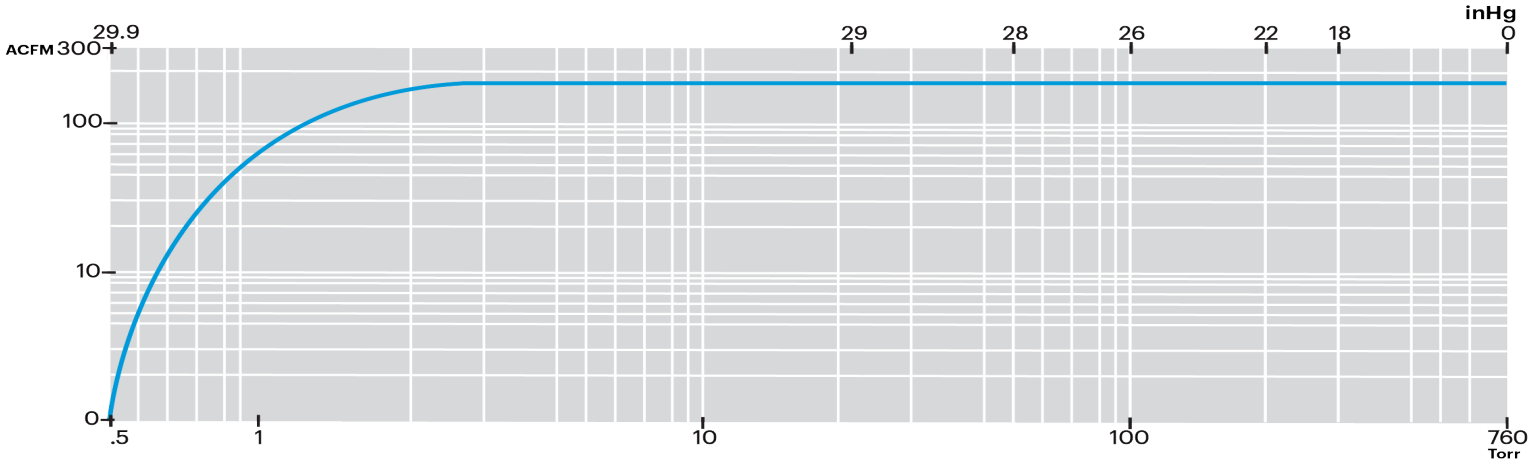

Pump Performance Measured at the Inlet Pressure and 20°C. Accuracy is +/- 10%


Model	Capacity	Ultimate Vacuum	Motor Rating	Speed	Voltage	FLA	dB[A]	Weight*
L250F	177 ACFM	0.5 Torr	10 HP	1760	230/460	23.9/12A	77	406 Lbs


*Standard Motor is C1D2 Compliant. Additional Motor Types and Voltages May be Available Upon Request


DIMENSIONS

ACCESSORIES

Inlet Filter	**ATF-200-15124**
Filter Element	**ATC-15124**
Check Valve	**07-1-4SLB**
Exhaust Filter Kit	**0500.505.00**
Overhaul Kit	**0500.500.01**
Combo Overhaul Kit	**0500.509.01**

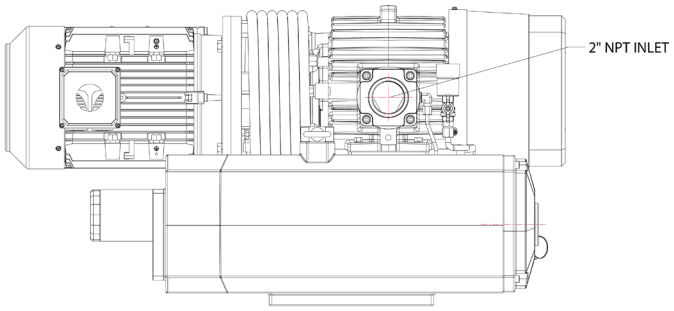

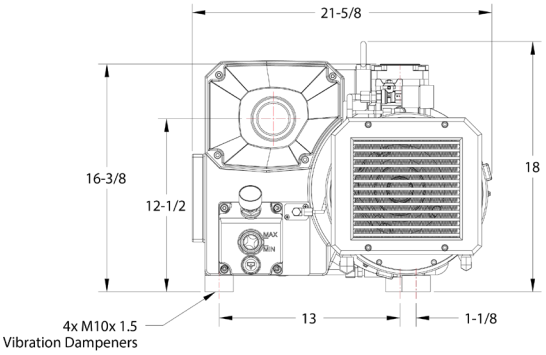

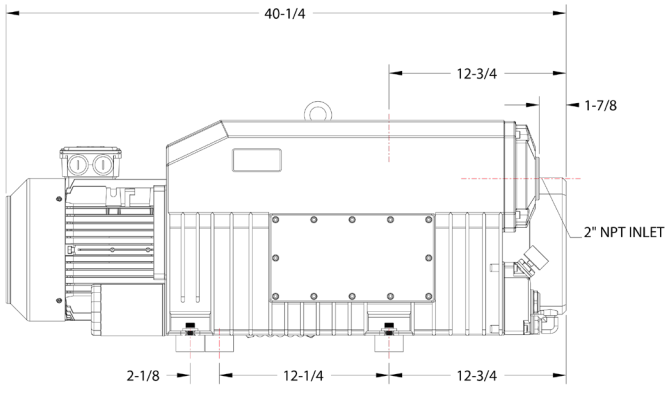

AIRTECH VACUUM
A BUSINESS UNIT OF IDEX
301 VETERANS BLVD.,
RUTHERFORD, NJ 07070

Specifications are subject to change without notice or obligation. Read all safety instructions in the manual prior to use.

LEARN MORE ABOUT THE L-SERIES

Copy Right Airtech Vacuum

REVISION DATE: 5/30/2024