Omega™ XPV Monitor

Style 3523 1250 GPM (4800 LPM)

The Omega XPV brass monitor has a built-in valve for optimal versatility in industrial and marine environments.



Style #3523 shown with style #4461 nozzle

- Brass construction for corrosion resistance
- Cast-in turning vanes for more efficient flow
- Unique locking mechanism to hold desired position
- Built-in 3" Heavy-Duty Swing-Out™ valve
- Enhanced design provides for less tip weight which translates to lower handle operating force
- 360° of horizontal movement and 135° of vertical movement
- Elevation 90° above to 45° below horizontal
- Maximum operating pressure of 200 psi
- Maximum flow 1250 gpm (4800 lpm)


Incorporates Akron's proven Generation II Heavy-Duty™ Swing-Out Valve technology

- Unique 316 grade stainless steel ball - designed for superior gating
- 90° adjustable handle travel
- No lubrication or regular maintenance required
- Designed to exceed NFPA requirements

FM APPROVED

Style	Weight lbs. (kg)	Height	Weight	Depth	Inlet	Outlet	FLOW GPM	FLOW LPM
3523	84 lbs* (38.2 kg)	21 3/16"* (538 mm)	16 1/4" (413 mm)	9 3/4" (248 mm)	3" or 4" FL (75 or 100 mm)	2.5" NH (65 cm)	1250	4800

* Less nozzle & handle

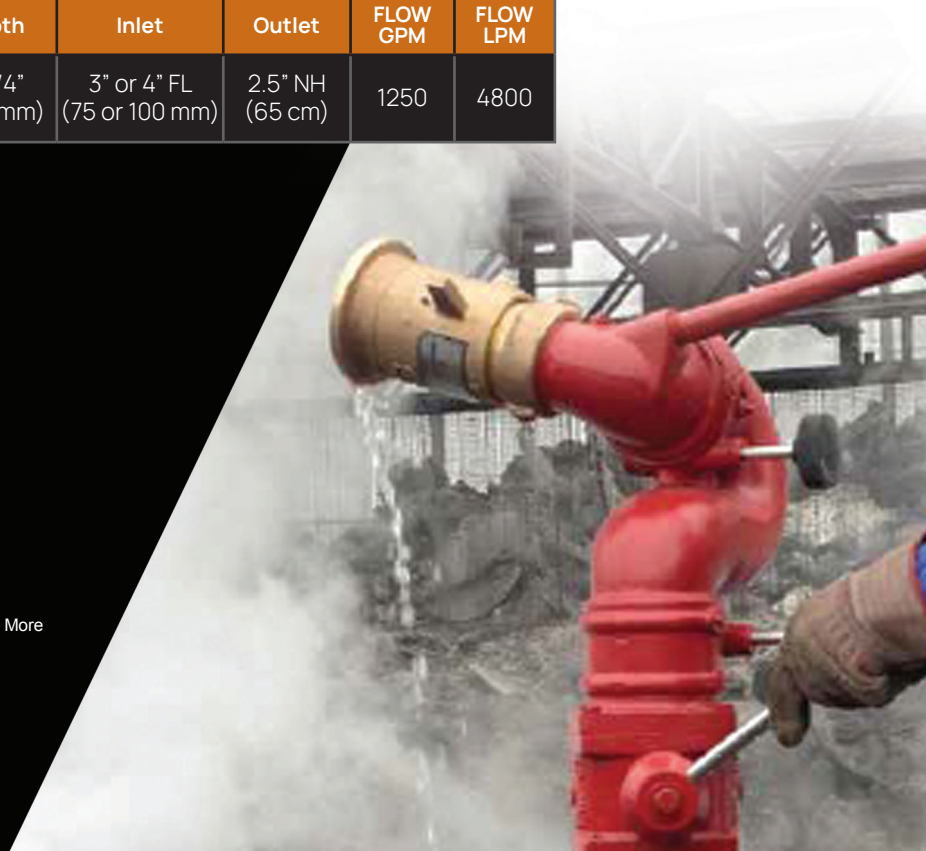

Akron Brass Firefighting Equipment | Fire Nozzles, Firefighting Valves, and More

akronbrass.com

IDEX FIRE & SAFETY