DATASHEET

L40B



COMPACT

DIRECT DRIVE DESIGN REQUIRES NO BELTS,
EASY INSTALLATION

QUIET OPERATION

INTEGRATED EXHAUST FILTERS & VIBRATION ISOLATORS
REDUCE VIBRATION AND NOISE LEVEL

DURABILITY

HIGH PERFORMANCE COMPOSITE VANES & IMPROVED
OIL RECIRCULATION SYSTEM INCREASE LONGEVITY

APPLICATIONS

MEAT PACKAGING

FOOD PROCESSING

DEGASSING

VACUUM HOLD DOWN

PICK AND PLACE

MEDICAL VACUUM


VACUUM FORMING

L-SERIES | OIL-LUBRICATED ROTARY VANE VACUUM PUMP

AIRTECH® VACUUM

L40B

PERFORMANCE

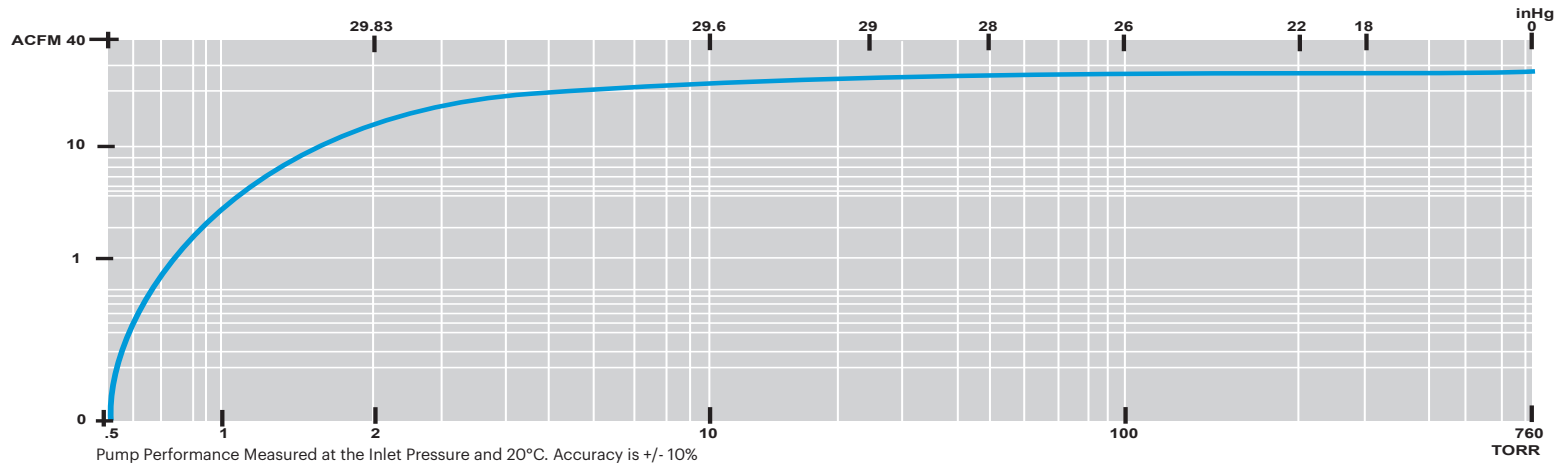

Pump Performance Measured at the Inlet Pressure and 20°C. Accuracy is +/- 10%


Model	Capacity	Ultimate Vacuum	Motor Rating	Speed	Voltage	FLA	dB[A]	Oil Capacity	Weight*
L40B	28 ACFM	0.5 Torr	2 HP	1725	230/460	5.6/2.8A	67	1.5 Qts	118 Lbs


*Standard Motor is C1D2 Compliant. Additional Motor Types and Voltages May be Available Upon Request


ACCESSORIES

Inlet Filter	**ATF-125-1112**
Filter Element	**ATC-1112**
Check Valve	**07-1-4SLB**
Exhaust Filter Kit	**0060.505.00**
Overhaul Kit	**0080.500.02**
Combo Overhaul Kit	**0080.590.00**

DIMENSIONS

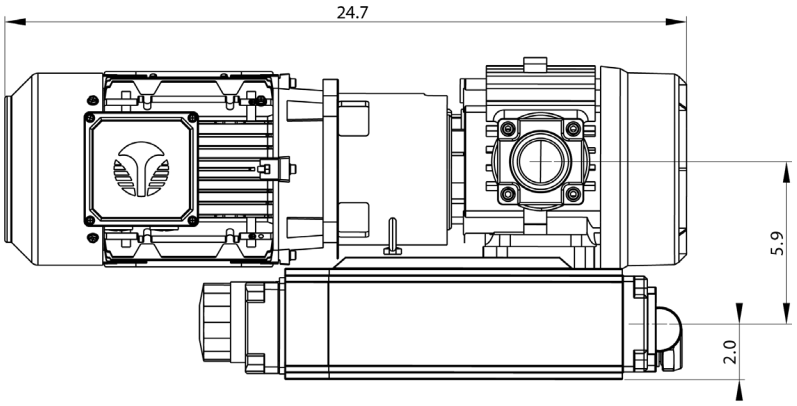

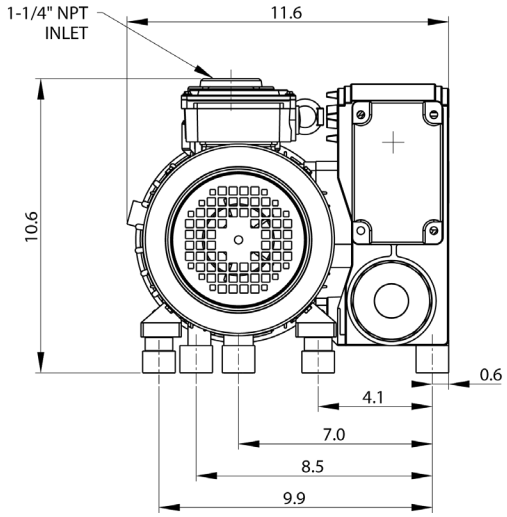

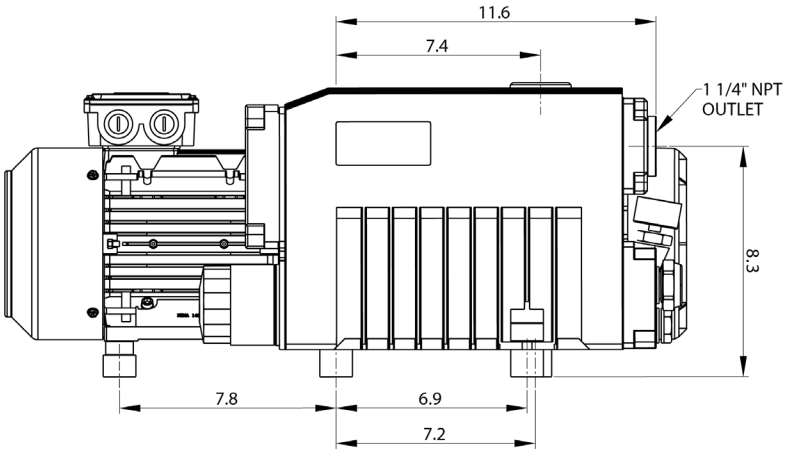

AIRTECH VACUUM
A BUSINESS UNIT OF IDEX
301 VETERANS BLVD.,
RUTHERFORD, NJ 07070

Specifications are subject to change without notice or obligation. Read all safety instructions in the manual prior to use.

©2024 Airtech Corporation

LEARN MORE ABOUT THE L-SERIES

Copy Right Airtech Vacuum

REVISION DATE: 07/08/2024