
DATASHEET

L12B/L21B

AIRTECH® VACUUM

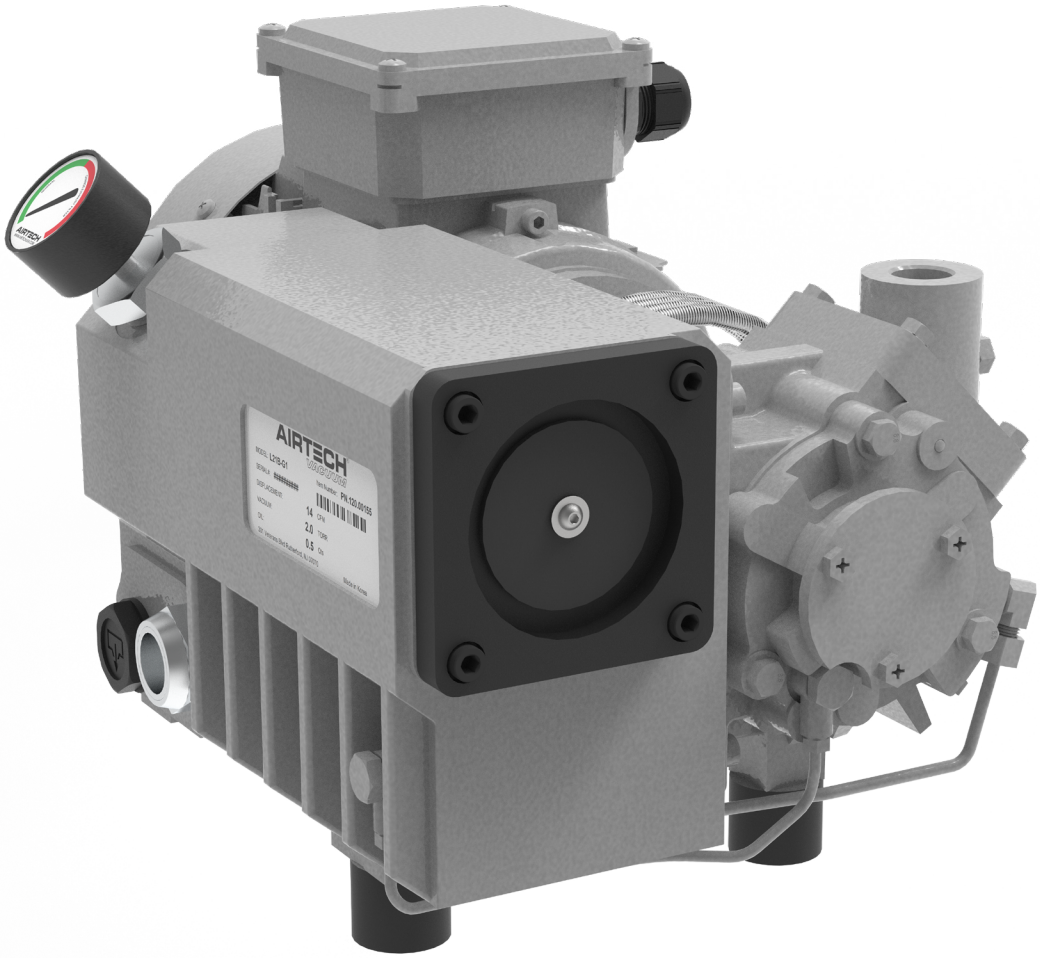

COMPACT

DIRECT DRIVE DESIGN REQUIRES NO BELTS,
EASY INSTALLATION

QUIET OPERATION

INTEGRATED EXHAUST FILTERS & VIBRATION ISOLATORS
REDUCE VIBRATION AND NOISE LEVEL

DURABILITY

HIGH PERFORMANCE COMPOSITE VANES & IMPROVED
OIL RECIRCULATION SYSTEM INCREASE LONGEVITY

APPLICATIONS

MEAT PACKAGING

FOOD PROCESSING

DEGASSING

VACUUM HOLD DOWN

PICK AND PLACE

MEDICAL VACUUM


VACUUM FORMING

L-SERIES | OIL-LUBRICATED ROTARY VANE VACUUM PUMP

AIRTECH® VACUUM

L12B/L21B

PERFORMANCE

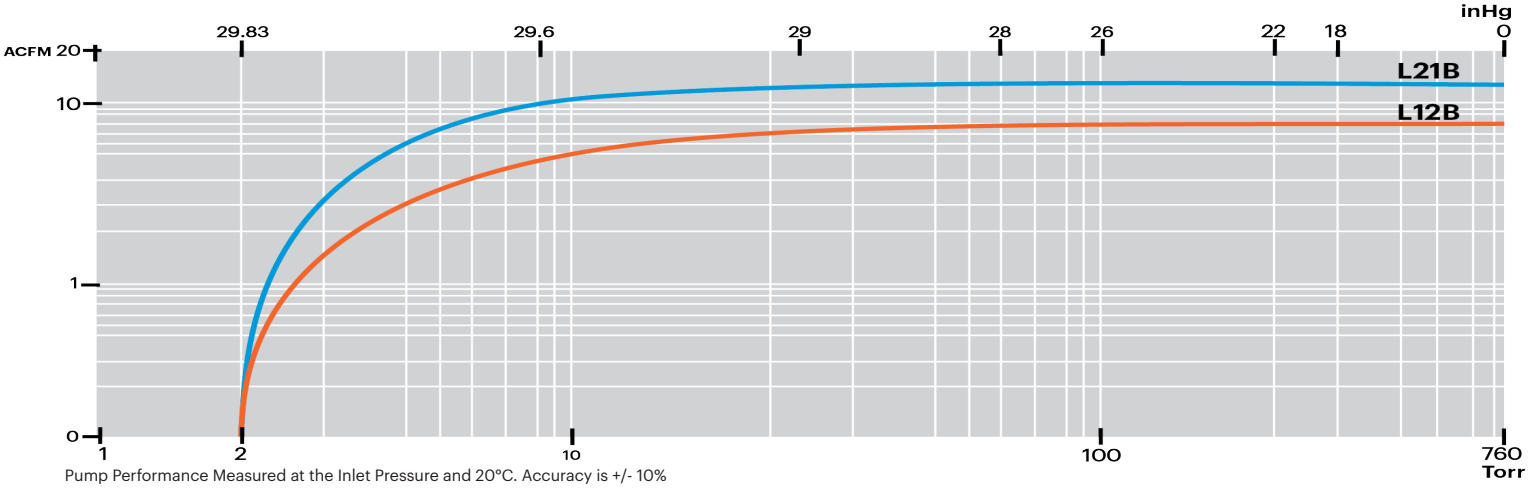

Pump Performance Measured at the Inlet Pressure and 20°C. Accuracy is +/- 10%


Model	Capacity	Ultimate Vacuum	Motor Rating	Speed	Voltage	FLA	dB[A]	Weight*
L12B	7 ACFM	2 Torr	0.75 HP	1750	230/460	2.5/1.3 A	59	44 Lbs
L21B	14 ACFM	2 Torr	1 HP	3480	230/460	3.1/1.6 A	62	44 Lbs


*Standard Motor is C1D2 Compliant. Additional Motor Types and Voltages May be Available Upon Request


ACCESSORIES

Inlet Filter	**ATF-050-75**
Filter Element	**ATC-75**
Check Valve	**07-1-4SLB**
Exhaust Filter Kit	**0040.505.00**
Overhaul Kit	**0040.500.01**
Combo Overhaul Kit	**0040.509.01**

DIMENSIONS

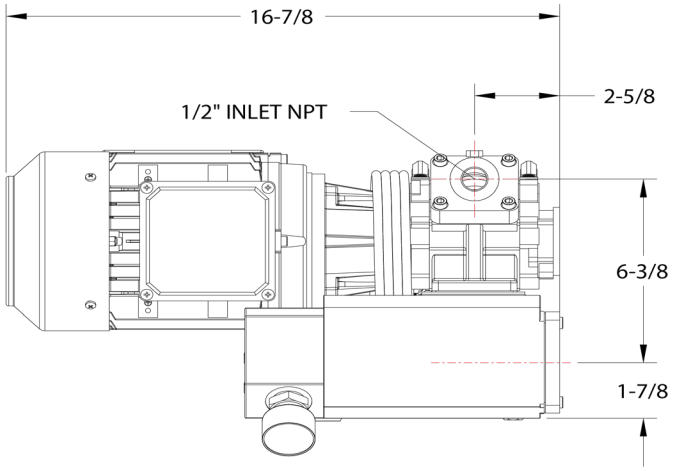

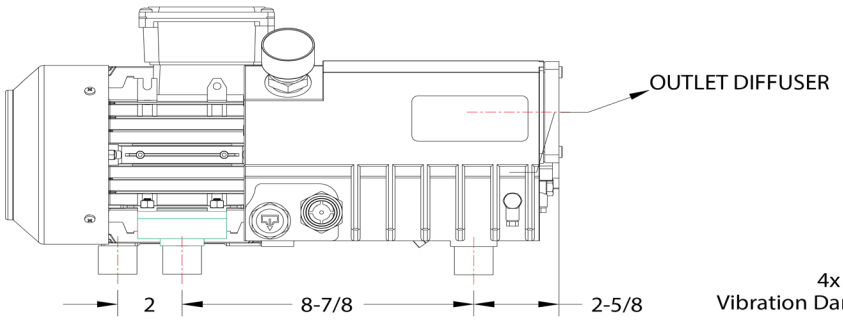

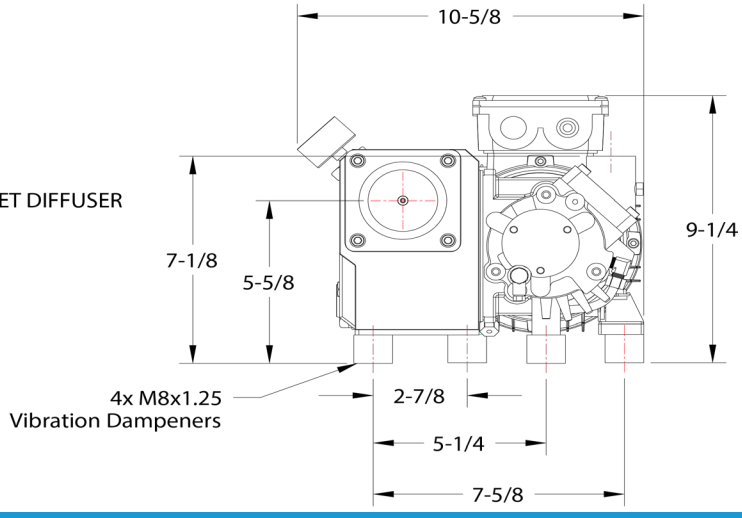

AIRTECH VACUUM
A BUSINESS UNIT OF IDEX
301 VETERANS BLVD.,
RUTHERFORD, NJ 07070

Specifications are subject to change without notice or obligation. Read all safety instructions in the manual prior to use.
©2024 Airtech Corporation

LEARN MORE ABOUT THE L-SERIES

Copy Right Airtech Vacuum

REVISION DATE: 7/08/2024