
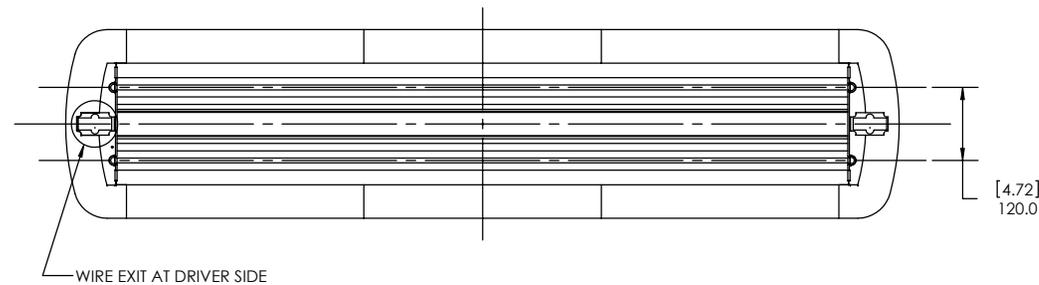



THIS DRAWING AND ALL INFORMATION CONTAINED HEREIN IS THE PROPERTY OF WELDON TECHNOLOGIES, INC. AND MAY NOT BE COPIED, REPRODUCED, OR DIVULGED TO UNAUTHORIZED PERSONS WITHOUT THE EXPRESS WRITTEN CONSENT OF WELDON TECHNOLOGIES, INC. AS IT IS BEING PROVIDED SOLELY FOR THE CONVENIENCE OF THE USER AND SHALL BE RETURNED TO WELDON TECHNOLOGIES, INC. UPON REQUEST.

REVISIONS				
REV.	ECN	DESCRIPTION	DATE	BY / APVD
1	--	PRELIMINARY RELEASE	1/11/10	TB

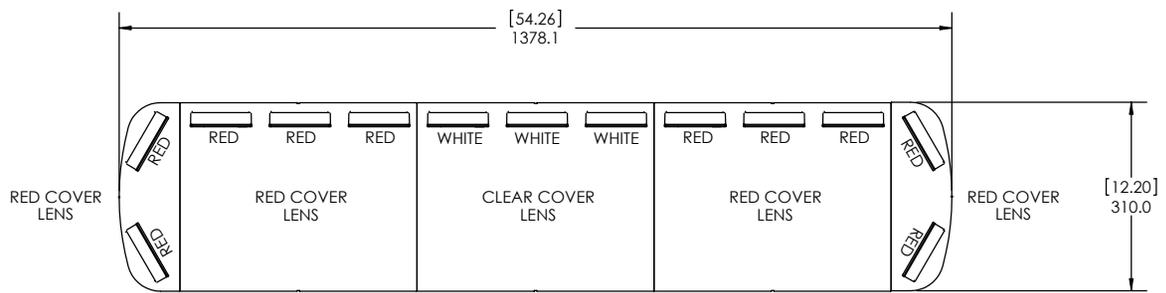

- NOTES:
1. INPUT VOLTAGE RANGE = 10-16 VDC
 2. CURRENT = 4.0 AMPS PEAK; 2.2 AMPS AVERAGE
 3. WIRE COLOR/FUNCTION ARE:
 RED = POWER (+)
 BLACK = GROUND (-)
 ORANGE = ENABLE PRIMARY MODE (+)
 PINK = ENABLE SECONDARY MODE (+)
 PURPLE = NOT USED
 - NOTE: THE ORANGE AND PINK WIRES SHOULD NOT HAVE POWER APPLIED TO BOTH WIRES AT THE SAME TIME.
 4. CABLE LENGTH IS 4.5 METERS (14.7 FEET) FROM THE INTERNAL CONNECTION POINT IN THE LIGHTBAR. CABLE EXITS THE LIGHTBAR ON THE DRIVER SIDE.
 5. LENSES ARE POLYCARBONATE. LIGHTBAR CHASSIS IS ALUMINUM.
 6. OTHER LIGHTHEAD OPTIONS AND COVER LENS COLORS ARE AVAILABLE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS IN MILLIMETERS TOLERANCES ARE: X.XXX - ±0.100 X.XX - ±0.50 X.X - ±1.0 ANGLES - ±0.5°	CAD GENERATED DRAWING. DO NOT MANUALLY UPDATE		WELDON TECHNOLOGIES, INC.	
	APPROVALS	DATE		
MATERIAL	DRAWN BARNETT	1/11/10	NFPA LIGHTBAR ROOF MOUNT, 54"	
FINISH	CHECKED			
DO NOT SCALE DRAWING	PROJ. NO.		SIZE B	PART NO. C9188-1554-00
			SCALE:	REV. 1