





EJBX - Junction Box

The Akron Brass Junction Box is a must have on every apparatus, as it provides easy distribution of power for your electrical needs on the fire ground. The Junction Box's durable design utilizes a heavy duty powder coated aluminum housing with a large integral handle and internally backlit faceplates. This makes the Junction Box easy to carry with excellent visibility, allowing easy electrical connection in the darkest conditions. Akron Brass Junction Boxes can be configured to meet your department's needs. Inlet options include: a flanged inlet plug, a 12" pigtail with any grounded NEMA plug configurations, or pre-wired for hard wiring the unit onto a cord reel or electrical cord set. Outlet receptacle options include NEMA configurations for each of the four receptacles.

- Durable powder coated aluminum construction
- Backlit faceplates
- Custom configurations
- Easy to carry
- UL listed plugs and receptacles
- Meets NFPA requirements
- 9 1/4" (235 mm) L x 5 1/2" (104 mm) W x 8 1/2" (216 mm) H
- Standard color: Gray

Additional Options:

- 30 Amp or dual inlet configurations
- GFCI protected receptacles



EJBX-VMT-TP
Aluminum treadplate
vertical mounting bracket




EJBV-HMT-TP
Aluminum treadplate
horizontal mounting bracket



JUNCTION BOX OPTIONS	
EJBX-VMT-TP	Aluminum treadplate vertical mounting bracket
EJBV-HMT-TP	Aluminum treadplate horizontal mounting bracket
EJBX-GFI	Household duplex receptacle (Note: The GFCI receptacle will be wired first making all down stream receptacles protected unless requested otherwise).



Junction Box
ready for
Direct Wiring

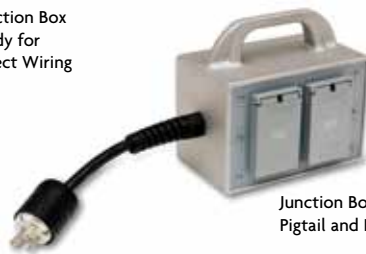

Junction Box with
Pigtail and Plug

Pigtail Plug Cord Options		
NEMA #		Description
5-15		15 AMP, 125V Straight Blade
5-20		20 AMP, 125V Straight Blade
L5-15		15 AMP, 125V Twist Lock
L5-20		20 AMP, 125V Twist Lock

Receptacle Options		
NEMA #		Description
5-15		Single 15 AMP, 125V Straight Blade
5-15 Duplex		Duplex 15 AMP, 125V Straight Blade
5-15 GFCI Duplex		Duplex 15 AMP, 125V Straight Blade
5-20		Single 20 AMP, 125V Straight Blade
5-20 Duplex		Duplex 20 AMP, 125V Straight Blade

NEM #		AMP/V
5-20 GFCI Duplex		GFCI, Duplex 20 AMP, 125V Straight Blade
L5-15		Single 15 AMP, 125V Twist Lock
L5-15 Duplex		Duplex 15 AMP, 125V Twist Lock
L5-20		20 AMP, 125V Twist Lock
L5-30		30 AMP, 125V Twist Lock. (used with direct wire inlet only)