

Severe Duty Order Form



Select Voltage:

Select One

☐	12 Volt
☐	24 Volt

Select Inlet/Outlet:

Select

☐	3" flange x 2.5" NH
☐	2.5" NPT x 2.5" NH


Select Paint:

☒	Black (standard)
-------------------------------------	------------------

Select Nozzle: (specify thread if other than NH)

Select One

☐	No Nozzle
☐	1578 Sabermaster 1.5" Tip (600 GPM) 1 3/8" Tip (500 GPM)
☐	4042 Akro-Chem 750-2000gpm (2850-7600lpm) water/foam & dry chem (3480 only)
☐	2499 Quad Stack Tip Set (requires 3488 or 3485 shaper)
☐	3485 2.5" x 2.5" mini shaper, 4" long
☐	3488 2.5" x 2.5" standard shaper 11.5" long
☐	No Shaper
☐	3293 Adjustable Flow 500 GPM (1900 LPM)
☐	4462 Rampage 750 GPM (2900 LPM)
☐	4471 Akrofoam 750 GPM (2900 LPM)

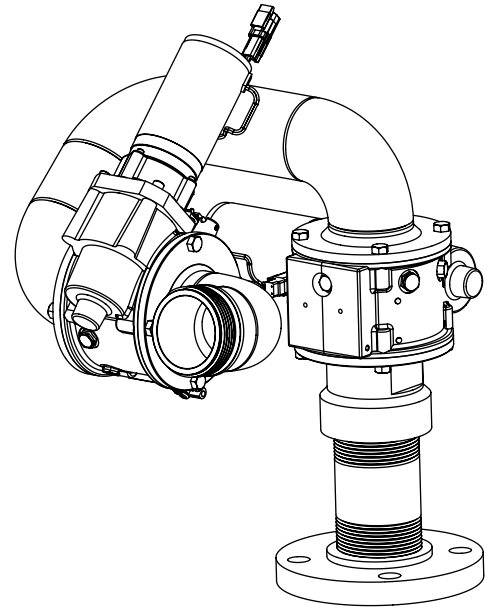

Select Control Options:

Quantity			
60350009		Standard CAN Proportional Joystick	
60350012		ARFF CAN Joystick (Provides Stow/Deploy, Oscillation, High/Low Flow, and Dry Chemical)	
60412002		CAN Tether with Mini Joystick Stow/Deploy, Osc, Fog/Stream, & Valve with Panel Connector	
60470002 60370018		Handheld Wireless Controller Left/Right, Up/Down, Fog/Stream, Stow/Deploy, Oscillate & Valve Wireless Receiver	
60470010		Wireless Controller Battery Charger	

Quantity			
60410008		CAN 4 Toggle Stow/Deploy, Up/Down, Right/Left, & Fog/Stream	
60410023		CAN 3 Toggle Up/Down, Right/Left, & Fog/Stream	
60411000		CAN 3 Toggle Stow/Deploy, Fog/Stream, Osc, & Mini Joystick (lft/rt/up/down)	
60411003		CAN 2 Toggle Stow/Deploy, Fog/Stream, & Mini Joystick (lft/rt/up/down)	
60410034		CAN 4 Toggle Oscillation, Up/Down, Right/Left, & Fog/Stream	

Select Options:

Select Any



60410035		"OEM Interface Module Enable use of standard switch inputs"	
3406		Electric Riser. Provides 12" of vertical extension to the monitor. Extend/Retract sequence automatically integrated to Stow/Deploy sequence of the monitor. (Flow limited to 1500 gpm)	

Severe Duty Order Form




Cable Assemblies:

Akron Brass offers pre-engineered cable assemblies to quicken the installation process. **These are optional items.** Refer to the example system diagram below to identify which cable assemblies you require, then indicate the quantity next to the corresponding part number in the list below.

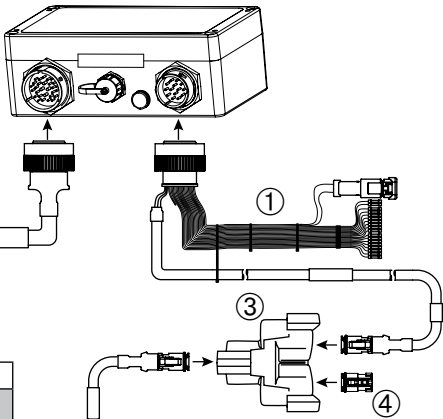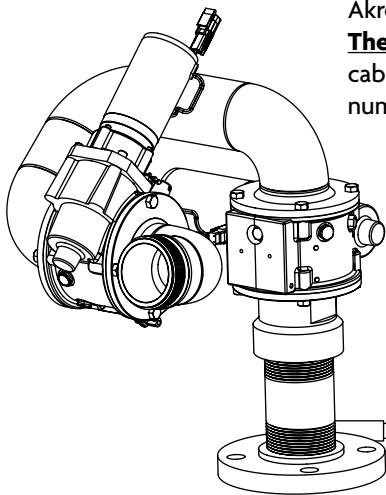

CAN Network Wiring Assemblies

	Quantity	Part #	Description
①	1	721582	U2, J1 interface harness. Provides connection between U2 and CAN network and leads for optional inputs and outputs. One needed per system. 3ft. (1m)
②		721579	CAN device stub harness with power and ground leads 3ft. (1m)
③		758306	CAN network Tee. Provides connection between device stubs and network extension cables. (1 per device including logic box)
④	2	742205	CAN network terminator plugs. Two required per system (one at each end of network).
⑤		Part #	CAN network extension cables used between device tees
		721572	3ft. (1m)
		721573	5ft. (1.5m)
		721574	10ft. (3m)
		721570	20ft. (6m)
		721575	40ft. (12m)
⑥		721580	CAN Wireless module stub harness, one per module.
⑦		721594	Electric Riser controller stub harness
⑧		721592	Optional monitor harness extension. Maximum two per system 8ft. (2.5m) each, for total length of 24ft. (7.5m)

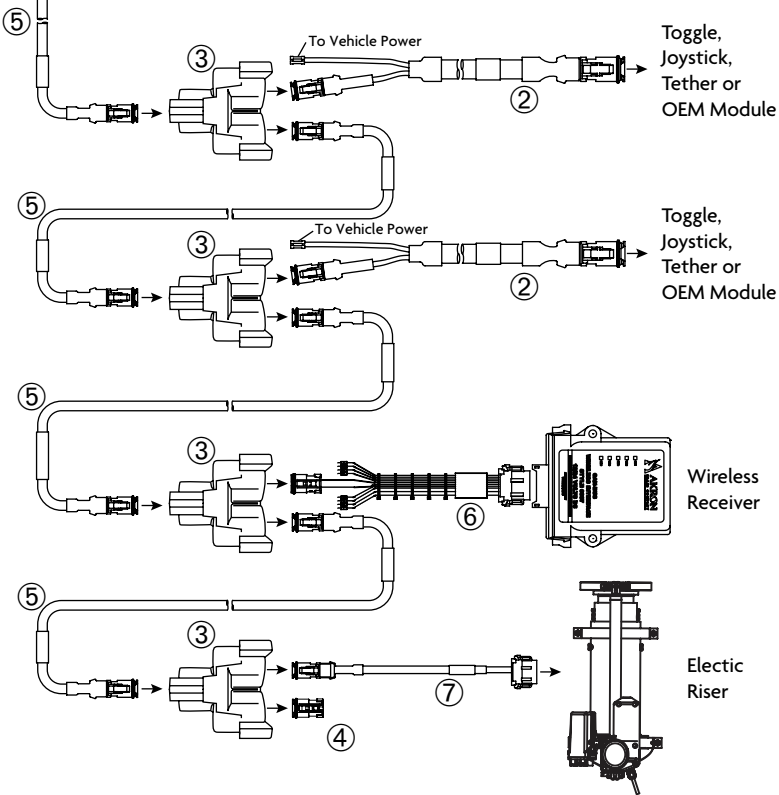

Send PO & completed order guide to akroncare@idexcorp.com or call 800.228.1161