


Ultra-Wide Turbojet Nozzle

STYLE 1772

The patent-pending Ultra-Wide Turbojet one inch handline nozzle combines the hard-hitting straight stream and the protection of nearly 180 degrees of ultra-wide fog. This selectable gallonage nozzle goes beyond the standard 120 degree fog pattern. The Style 1772 offers great stream performance with superb fog capabilities.

The Ultra-Wide Turbojet nozzle excels at fighting compartment fires such as those found in apartments, hotels and onboard ships of all sizes. Fighting fires often requires the ability to attack with a straight stream, cool gases with a 30 degree cone setting and protect with the ultra-wide pattern setting. This nozzle offers all three settings with a turn of the pattern control bumper. The ultra-wide fog pattern measures about 16 feet (5m) in diameter giving a large disc of protection for the firefighter.

The Ultra-Wide Turbojet was designed for gas cooling, sealing bulk head doors and overall firefighter protection.


- Ultra-wide fog pattern for ultra-firefighter protection
- Uniquely designed for sealing doorways
- Pattern identifier on the bumper (raised lug)
- Flush without shutting down the nozzle
- Flow Settings 100 psi (7 bar) to 250 psi (17 bar)
- Swivel Inlet Options
 - 1" BSP, NH
 - BIM, JIM, and STORZ
- Conforms to SOLAS and MED 
- Meets European CE Standards
- 10 year warranty



Style 1772

Style	Swivel Inlet	Length	Weight lbs. (kg)	Flow Settings	
				GPM	LPM
1772	1" (25 mm)	9 1/2" (241 mm)	3 (1.4 kg)	13-25-40-60	50-100-150-230

1722 TurboJet Nozzle
Reach Distance in m at 7 bar
32 degrees elevation

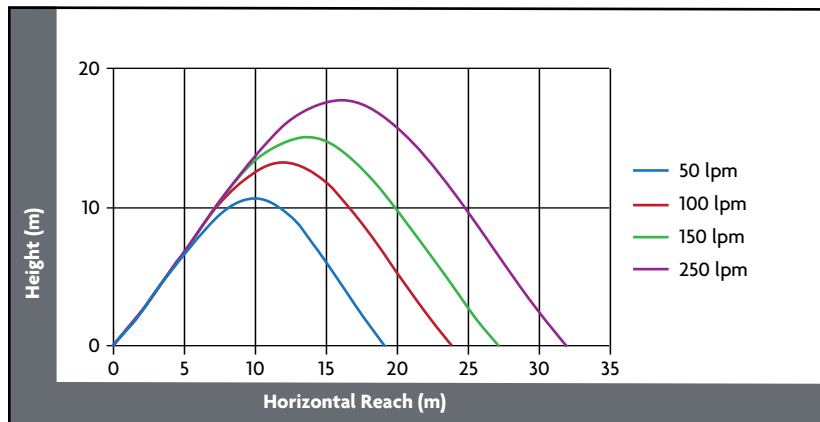

1722 TurboJet Nozzle
Reach Distance in ft at 100 psi
32 degrees elevation

