

1

2

3

4



5

6

7

8

Chg.	Description	Date	Approved

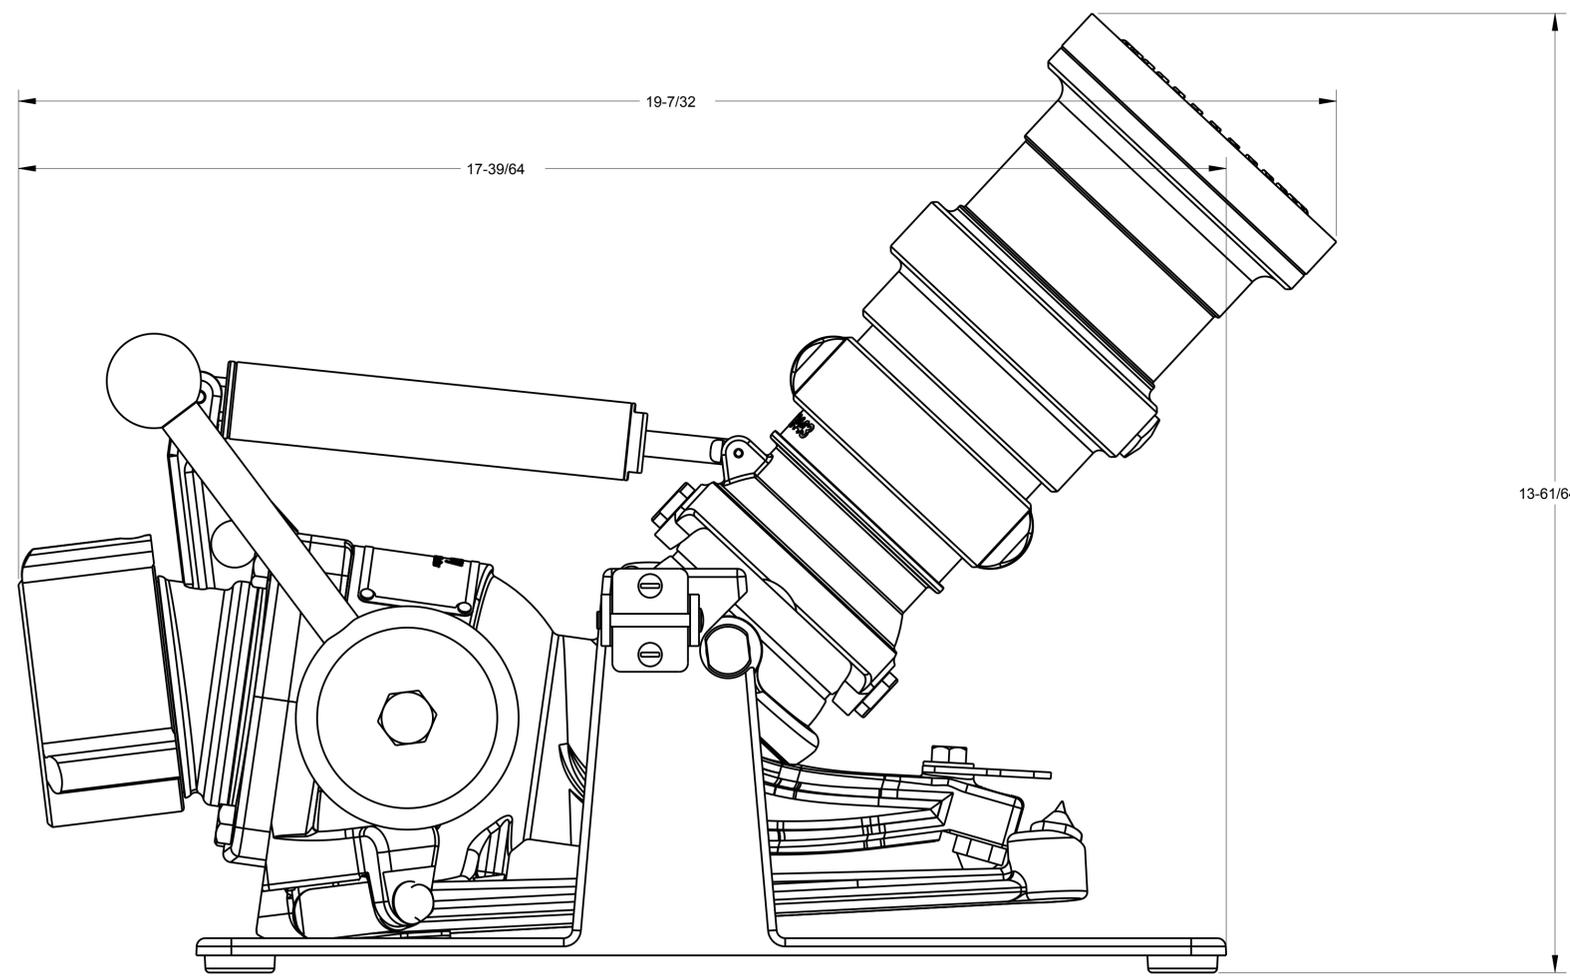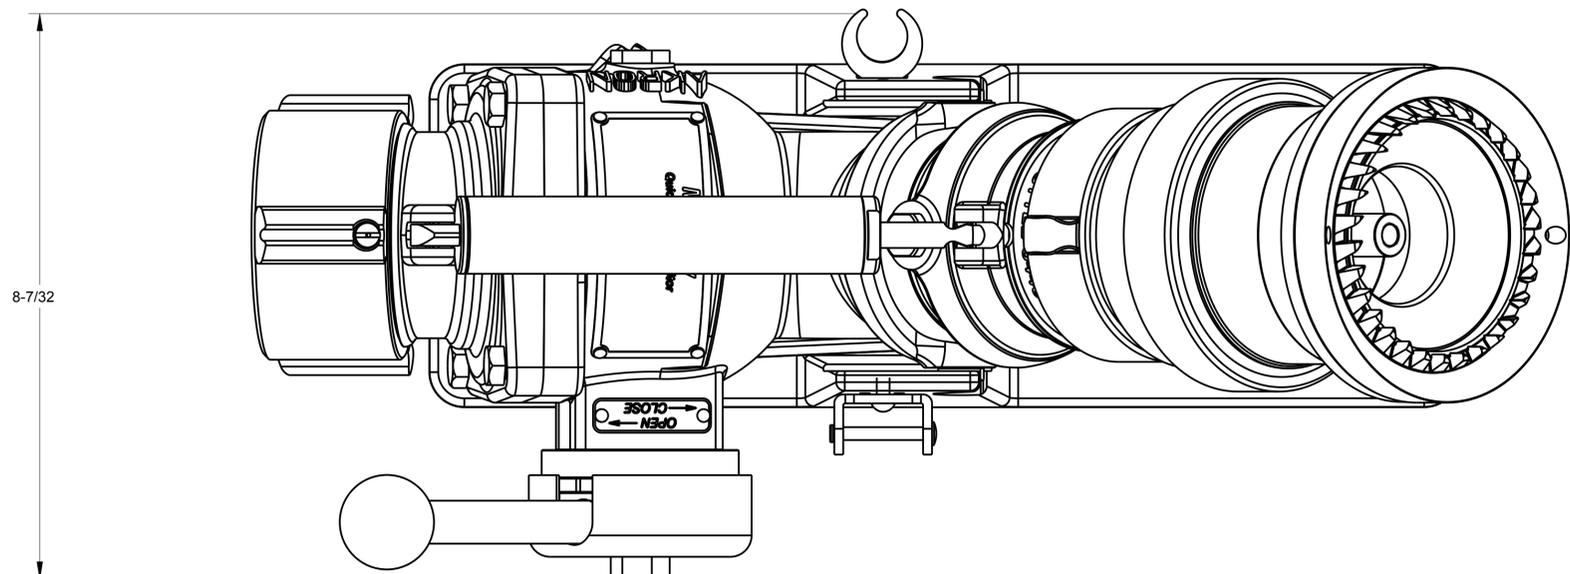

Part Number(s):	Description(s):	<p align="center">NOTICE</p> <p>This document and the information hereon are confidential and are the EXCLUSIVE PROPERTY of Akron Brass Co., Wooster, Ohio and shall not be REPRODUCED or USED without the prior written consent of Akron Brass Co.</p>		<p>Drawing Notes: Geometric Tolerances based on ASME Y14.5 ALL of the following notes apply unless otherwise specified:</p> <ol style="list-style-type: none"> DO NOT SCALE DRAWING ALL dimensions are in inches. Tol on all fractions +/- 1/64 Tol on 3 place decimals +/- .005 Tol on 2 place decimals +/- .02 Tol on all angles +/- 1/2° ALL inside corners to have .005-.035 fillets. ALL outside corners to have .005-.015 chamfer or radius. ALL machine surfaces to have 125 finish. ALL castings to have 250 finish. 	<p>Material:</p> <p>Finish:</p> <p>Specifications:</p>	 <p>AKRON BRASS COMPANY</p> <p>A PREMIER FARNELL COMPANY WOOSTER, OHIO 44691 (330) 264-5678</p>	<p>Design By: DES 3/03</p> <p>Drawn By: CTR 3/03</p> <p>Apprv'd By:</p>
		<p>Third Angle Projection</p> <p>Government I.D. No.: 00912</p>	<p>Title:</p> <p align="center">ASSEMBLY</p> <p align="center">MERCURY QUICK ATTACK</p> <p>Style(s):</p> <p align="center">3443</p>				<p>Drawing No.</p> <p align="center">D42294_1</p> <p>Weight (LBS) 0.000</p> <p>Area (SQ.FT.)</p> <p>Scale: 0.750 Sheet(s): 1 of 2</p>

1

2

3

4


5

6

7

8

Chg.	Description	Date	Approved

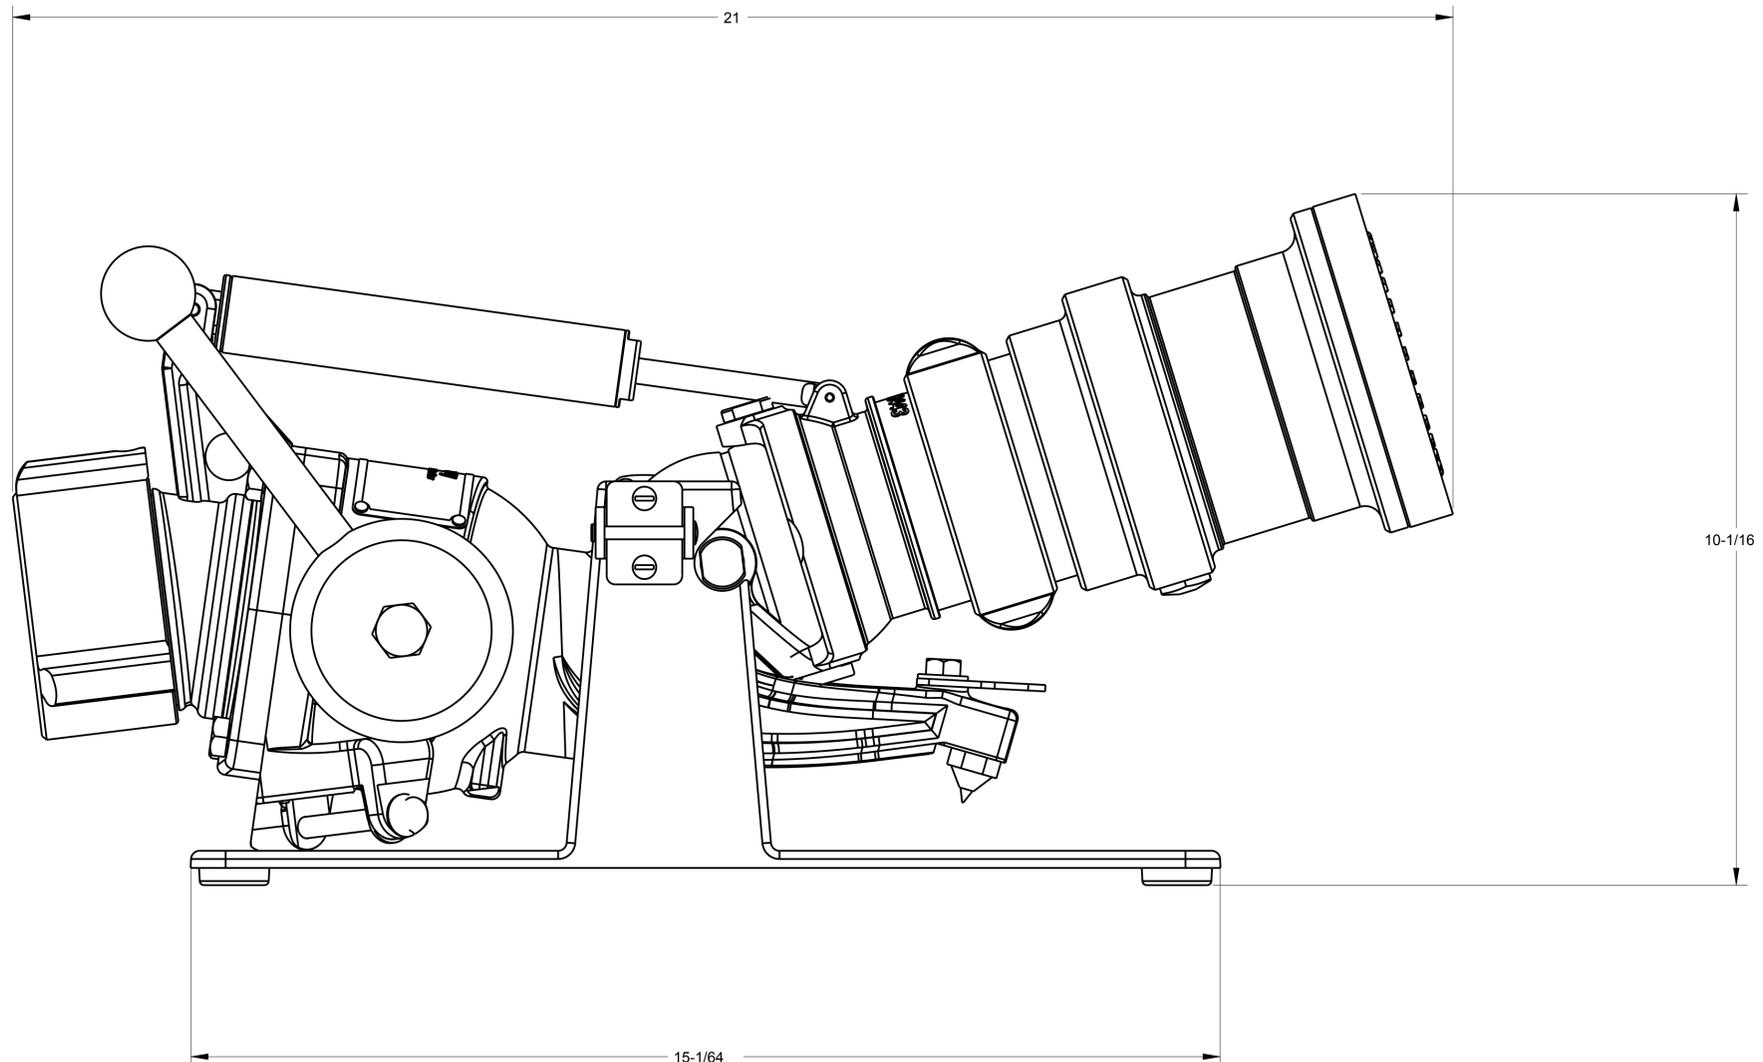

34430003		<p>NOTICE This document and the information hereon are confidential and are the EXCLUSIVE PROPERTY of Akron Brass Co., Wooster, Ohio and shall not be REPRODUCED or USED without the prior written consent of Akron Brass Co.</p>	<p>Drawing Notes: Geometric Tolerances based on ASME Y14.5 ALL of the following notes apply unless otherwise specified:</p> <ol style="list-style-type: none"> DO NOT SCALE DRAWING ALL dimensions are in inches. Tol on all fractions +/- 1/64 Tol on 3 place decimals +/- .005 Tol on 2 place decimals +/- .02 Tol on all angles +/- 1/2° ALL inside corners to have .005-.035 fillets. ALL outside corners to have .005-.015 chamfer or radius. ALL machine surfaces to have 125 finish. ALL castings to have 250 finish. 	<p>Material:</p> <p>Finish:</p> <p>Specifications:</p>	 <p>AKRON BRASS COMPANY</p> <p>A PREMIER FARNELL COMPANY WOOSTER, OHIO 44691 (330) 264-5678</p>	<p>Design By: DES 3/03</p>
						<p>Drawn By: CTR 3/03</p>
		<p>Third Angle Projection</p> 	<p>Government I.D. No.: 00912</p>		<p>Title: ASSEMBLY</p> <p>Product(s): MERCURY QUICK ATTACK</p> <p>Style(s): 3443</p>	<p>Apprv'd By:</p>
					<p>Drawing No. D42294_1</p>	<p>Weight (LBS) 0.000</p>
					<p>Area (SQ.FT.)</p>	<p>Scale: 0.750 Sheet(s): 2 of 2</p>
Part Number(s):	Description(s):					