



MAX. OPERATING PRESSURE 250 PSI
CAUTION: OPEN AND CLOSE VALVE SLOWLY

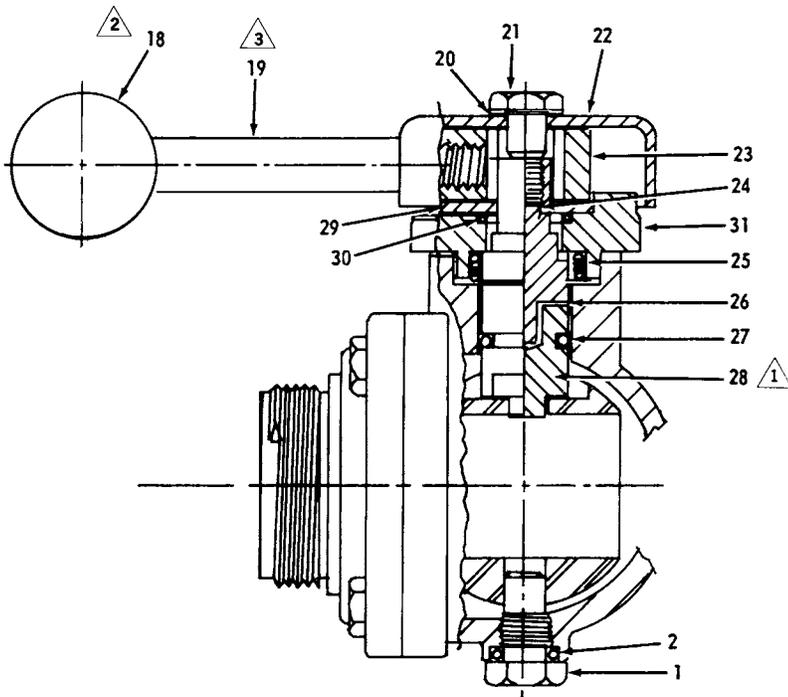

ASSEMBLY NOTES

- ⚠ Use Parker O-Ring Lubricant or equivalent petroleum base lubricant.
- ⚠ Use Loctite 222 or Permabond 113.
- ⚠ Use Loctite 271

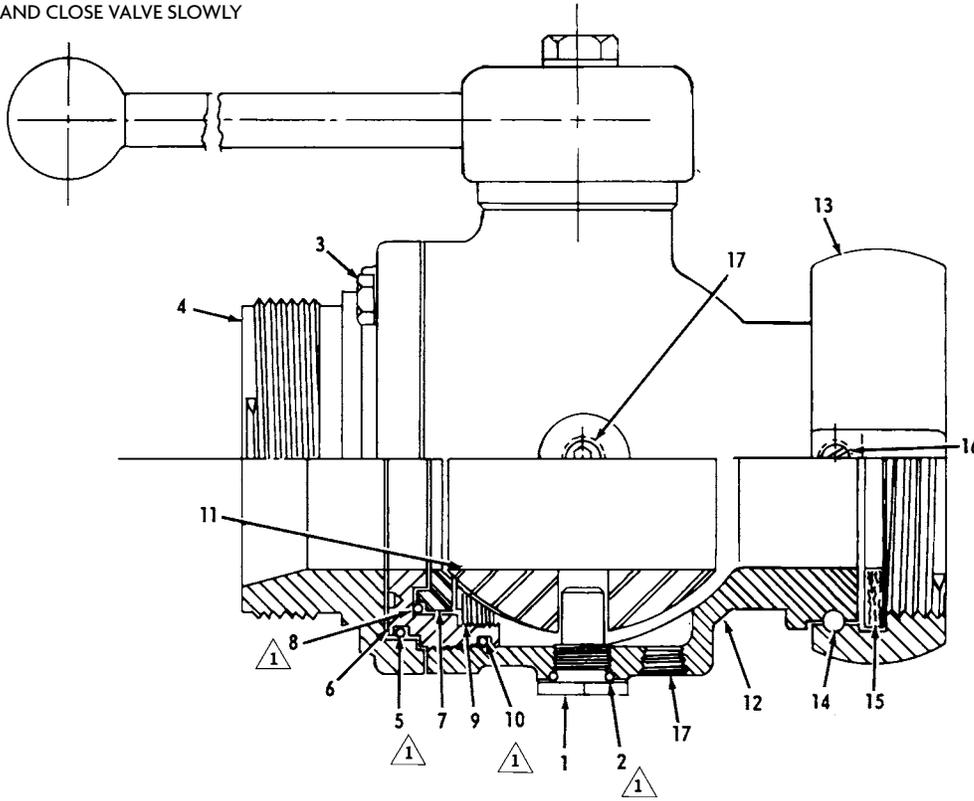

STYLE 1828
Pyrolite® Hydrant Valve
TECHNICAL SERVICE PARTS LIST

ITEM NO.	DESCRIPTION	PART NUMBER	QUANTITY
1	Threaded Trunnion	102177	1
2*	O-Ring	757198	1
3	Bolt	761016	4
4	Male Adapter** (NH)	102102	1
4	Male Adapter** (NPSH)	102124	1
5*	O-Ring	757017	1
6	Seat Housing	102174	1
7*	Seat	769156	1
8*	O-Ring	757035	1
9	Seat Retaining Ring	102176	1
10*	O-Ring	757073	1
11*	Ball	703429	1
12	Body†	102344	1
13	Swivel**--Rocker Lug 2-1/2" (NH)	101420	1
14	Ball Bearings	†	38
15	Swivel Gasket	717043	1
16	Swivel Plug	742023	1
17	Pipe Plug (not used on current product)	744011	3
18	Handle Ball	703080	1
19	Handle Rod	109193	1
20	Washer	784086	1
21	Hex Head Cap Screw	761045	1
22	Handle Cover	707369	1
23	Handle Hub	721278	1
24	Handle Trunnion	102178	1
25	Spring	768210	1
26	Retaining Ring	758154	1
27	O-Ring	757010	1
28	Ball Trunnion	102179	1
29	Stop Plate	742073	1
30	O-Ring	757284	1
31	Retaining Plate	742089	1
32	Soc. Head Cap Screw for Retaining Plate #31 (not shown)	765028	4

*Parts included in Field Service Kit #9128.

**For other threads order by description and thread size (ODM and TPI) or Akron Thread Code.

†Packet of 50 Ball Bearings - P/N 123074

‡‡Old Style Bodies (units with Red Handle Covers) are no longer available. If the body is needed - the handle assemblies must also be replaced. Contact Customer Service for additional information.



Tested... Proven... Trusted.

ISO 9001 REGISTERED COMPANY

PHONE: 330.264.5678 or 800.228.1161 | FAX: 330.264.2944 or 800.531.7335 | akronbrass.com

REVISED: 01/17

WARRANTY AND DISCLAIMER: We warrant Akron Brass products for a period of five (5) years after purchase against defects in materials or workmanship. Akron Brass will repair or replace product which fails to satisfy this warranty. Repair or replacement shall be at the discretion of Akron Brass. Products must be promptly returned to Akron Brass for warranty service.

We will not be responsible for: wear and tear; any improper installation, use, maintenance or storage; negligence of the owner or user; repair or modification after delivery; damage; failure to follow our instructions or recommendations; or anything else beyond our control. WE MAKE NO WARRANTIES, EXPRESS OR IMPLIED, OTHER THAN THOSE INCLUDED IN THIS WARRANTY STATEMENT, AND WE DISCLAIM ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. Further, we will not be responsible for any consequential, incidental or indirect damages (including, but not limited to, any loss of profits) from any cause whatsoever. No person has authority to change this warranty.

© Akron Brass Company, 2000 All rights reserved. No portion of this can be reproduced without the express written consent of Akron Brass Company.